

WELCOME TO AEOLUS

Aeolus Tyre Co.,Ltd. was founded in 1965, which is a leading tyre manufacturer in China.

The company's headquarter and research & development department are located in Jiaozuo/Henan in China, where the production facilities span a floor area of 1,300,000m² with more than 9000 employees. Aeolus is the most trusted partner of the toughest drivers of truck, bus, earthmoving, and agro machinery. We are the OE supplier of some famous equipment manufactures, such as VOLVO,DOOSAN and so on.

The Group has more than 58 years of experience serving any client need, everywhere. Aeolus is the company where some of the most passionate, creative, and high-performing people of

technology, innovation, and industrial development fields have come together to make the difference.

We strive for excellence, we always go with full power, big and strong, to deliver smart products that have positive and tangible impacts on the markets and the communities where we operate in. Aeolus becomes the trusted partner for the hardest jobs on earth, every day.

1000+

Specifications and varieties of tyres

800K

Annual production of OTR tyres

7M

Annual production of Truck & Bus tyres

140+

Best selling in global regions and countries

233

Patents

500

China's top 500 companies for 15 consecutive years





TECHNOLOGY



(SPIRAL TECHNOLOGY)

ENHANCED EVEN WEAR EXTENDED TYRE LIFE RETREADABILITY **HANDLING**



BPG

BIONIC PATTERN GROOVE)

REDUCE PATTERN NOISE IMPROVE HYDROPLANING



SPIRAL TECHNOLOGY FOR SUPER SINGLE



SHTB

(SUPER HIGH TENSILE BELT)

LOWER ROLLING RESISTANCE IMPROVED RETREADABILITY



(HEXAGONAL BEAD WIRE)

HIGH FLEXIBILITY AND EASY OF FITTING THERMAL STABILITY OF THE BEAD AND IMPROVED BEAD WIRE DURABILITY RETREADABILITY



AGT

(ANTI-DEFORMATION GROOVE TECHNOLOGY)

REDUCE FRICTION ENERGY AND EVEN WEAR HIGH MILEAGE



3D-SIPE

LOWER ROLLING RESISTANCE ENHANCE TRACTIVE



TPBC

(TREAD PROFILE BANLANCE CONTACT **TECHNOLOGY**)

IMPROVED BELT INTEGRITY BETTER CONTACT PRESSURE DISTRIBUTION UNDER FOOTPRINT

TREAD WEAR DURING THE LIFE OF THE TYRE. MPROVED RETREADABILITY

At Aeolus, investment in technology and high performance go together. We have the best machinery with advanced technologies, raw materials, and the most sophisticated manufacturing processes to deliver you the finest and most performing tyres.

Aeolus will apply all or part of the above technology on each Neo series product depending on different sizes & application.





PATTERN NAMING METHOD





Neo	Allroads	S+		
The first word is on behalf of the series name.	The second word represents the uses or road	The third word represents the installation of		
	we recommended.	the wheel we recommended.		
We choose the first letter "Neo" from "Neo	Fuel: Long haul	S: Steering		
series" on behalf of the third generation	Allroads: Regional use	D : Driving		
product of Aeolus.	Construct: On/off road	T: Trailer		
	Urban : Bus	G : All position		
	Winter: Winter			

A	D	С	69
The first letter on behalf of the company name. We choose the first letter "A" from "Aeolus Tyre" on behalf of the company's name	The second letter represents the installation of the wheel we recommended. S: Steering D: Driving T: Trailer G: All position	The third letter represents the uses or road we recommended L: Long haul R: Regional C: On/Off Road B: Bus M: Off Road W: Winter	The double digit represents pat- tern indentification code




HOW TO READ TYRE MARKINGS

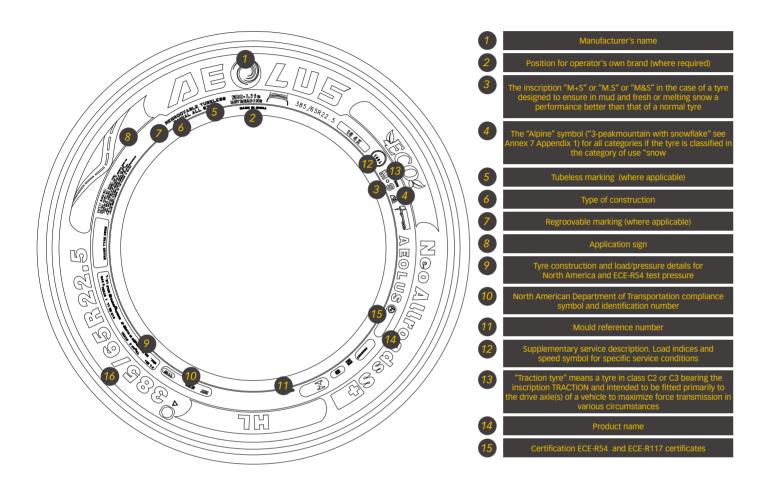

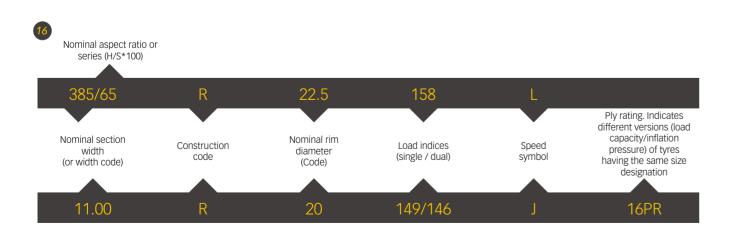

HOW TO READ TECHNICAL MARKINGS

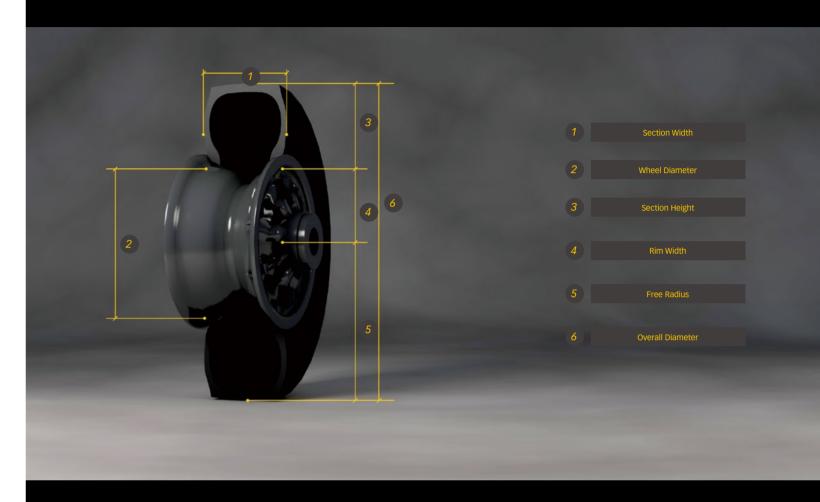

Size	Pattern	Ply Rating	LI/SS	Second. LI/	. LI/ Single Max. DualMax. Load(kg) Single(kPa) Dual (kPa)			Tread depth	M+S	
									mm	
295/75R22.5	Neo Fuel D3	16	146/143M		3000	2725	830	830	20.6	$\sqrt{}$
295/75R22.5	Neo Fuel G3	16	146/143M		3000	2725	830	830	15	√
275/80R22.5	ASR79	18	149/146 L		3250	3000	900	900	15	√

Single = 2 tyres per axle. Dual = 4 tyres per axle

A tyre's pressure should be matched to the load, speed, and condition of usage it is operating in. Each tyre size has two sets of values, one for Single usage and one for Dual usage. Single usage displays the maximum axle load for a given pressure when you have two tyres per axle such as a steer axle. Dual usage displays the maximum axle load for a given pressure when you have 4 tyres per axle such as a drive axle.







- •==•
- Wider tread pattern design effectively improving product mileage;
- SATT construction for better endurance, effectively secure tyre life;
- Using a low rolling resistance formula in tread to make Fuel D3 more fuel efficient;

- 4 longitudinal grooves on the tread providing excellent guiding performance
 Optimized ground pressure distribution to ensure product life
- SATT construction for better endurance, effectively secure tyre life
- Using a low rolling resistance formula in tread to make Fuel G3 more fuel efficient

Neo Fuel **D3**

Neo Fuel **G3**

SERVICE CHARACTERISTICS

NEO SERIES LONGHAUL

1,000 to 3,000 miles one way

Long hauls between countries or states

Very slow wear rate

Fairly constant loads

PERFORMANCE CRITERIA

Very smooth ride

Minimize uneven wear


Good stability / handling

Long original tread life

	Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
П	295/75R22.5	16	146/143M		20.6	√
Ш	11R22.5	16	146/143L		20.5	√

Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
295/75R22.5	16	146/143M		15	√
11R22.5	16	146/143M	148/145K	15	$\sqrt{}$



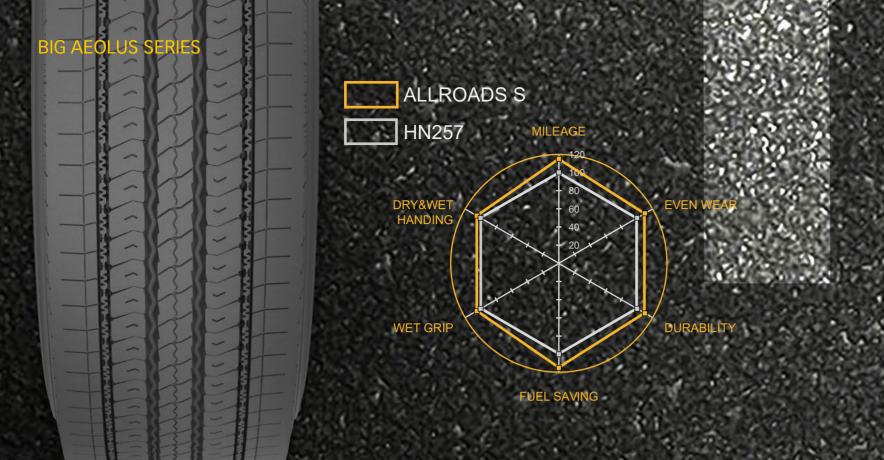





- Higher load capacity(EURO6 regulation);
- shorten braking distance and enhance driving safety with 4 zig-zag shape grooves and longitudinal ribs design .
- Good mileage with wider tread and deeper groove design;
- Reduce noise due to the optimised pattern design;
- Great steering, dry and wet road handling performance with optimise groove and sipe design;
- Excellent stone rejection performance with variable angle pattern groove design;
 Compound with high silica content guarantee great performances in a wide range of temperatures and conditions

Neo Allroads **S** —



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
245/70R17.5	18	134/132M		15	$\sqrt{}$
265/70R19.5	16	140/138M		13	√
285/70R19.5	16	146/144L	145/143M	14	$\sqrt{}$
315/70R22.5	18	156/150L	154/150M	15.5	$\sqrt{}$
215/75R17.5	18	135/133J		13	$\sqrt{}$
235/75R17.5	16	132/130M		13	√
235/75R17.5	18	143/141J		13	$\sqrt{}$
295/80R22.5	18	154/149M		16.5	√
315/80R22.5	18	158/150L	154/150M	16	$\sqrt{}$









- Shorten braking distance and enhance driving safety with 4 zig-zag shape grooves and longitudinal ribs design
- Good mileage with wider tread and deeper groove design.
- >> Great steering, dry and wet road handling performance with optimize groove and sipe design.
- >> Excellent stone rejection performance with variable angle pattern groove design .
- Sood fatigue resistance with full penetration cord
- >> Higher lifecycle performance with dual tread layer



- Drive wheel suitable for regional and long haul.
- >> Better traction with deeper and bigger grooves and special tread block pitch
- We Great even wear performance with connected pattern block design,
- >> Less noise and more comfortable with irregular pattern block design;
- >> Better even wear performance with optimised shoulder design.
-)) Good fatigue resistance with full penetration cord
-)) Higher lifecycle performance with dual tread layer

Neo Allroads S+ — Neo Allroads D





Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
385/55R22.5	20	160K	158L	15	√
385/65R22.5	20	164K	158L	15	√
385/65R22.5	24	164K		15	√



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
225/70R19.5	14	128/126M		15	√
245/70R17.5	18	136/134M		15.5	√
245/70R19.5	18	144/142J		17	√
265/70R19.5	16	140/138M		16.5	√
265/70R19.5	18	143/141J	146/146F	16.5	√
285/70R19.5	16	146/144L	145/143M	16	√
205/75R17.5	14	124/122M		14	√
215/75R17.5	18	135/133J		15	√
225/75R17.5	16	129/127M		14	√
235/75R17.5	16	132/130M		16	√
235/75R17.5	18	143/141J		16	√



- >>> Excellent life-cycle with directional tread pattern, deeper grooves and wider Enhanced traction performance on dry and wet road with Special 3D sipes
- >> Special belt structure design ensure excellent durability and multi-
- >> Improved life cycle of the product with special sipe heat emission design;
- >> Enhanced post-use traction performance with special sipe design;
- Good fatigue resistance with full penetration cord
- >> Higher lifecycle performance with dual tread layer

- Trailer use. >> Good mileage with wider tread and deeper groove design.
- Better handling performance with zig-zag shape grooves;
- >> Less noise and more comfortable with irregular pattern block design;
- >>> Excellent stone rejection performance with variable angle pattern groove design .
- Good fatigue resistance with full penetration cord
- Compound with high silica content guarantee low rolling resistance and heat generation







Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+5
295/60R22.5	18	150/147K	149/146L	18	
315/60R22.5	20	152/148L		19	
315/70R22.5	18	154/150L	152/148M	21	
295/80R22.5	18	152/148M		22	
315/80R22.5	18	156/150L	154/150M	21	
11R22.5	16	146/143L		22.5	√





Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
385/55R22.5	20	160K	158L	15.5	√
385/65R22.5	20	164K	158L	16.5	√
425/65R22.5	20	165K		16.5	√
445/65R22.5	20	169K		16.5	√
245/70R17.5	18	143/141J	146/146F	11	√
265/70R19.5	18	143/141J	146/146F	13	$\sqrt{}$
285/70R19.5	18	150/148J		14.5	$\sqrt{}$
215/75R17.5	18	135/133J		12.5	$\sqrt{}$
235/75R17.5	18	143/141J	144/144F	12.5	$\sqrt{}$





SAILOR SERIES REGIONAL USE

SAILOR AGR2911



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
12R22.5	18	152/149L		18	√

BIG AEOLUS SERIES



- Four ZIG-ZAG grooves and robust longitudinal ribs designed to reduced braking distance and to imporve road holding as well as driving safety;
- oistance and to imporve road noiding as well as driving safety;

 Innovative shoulder tread contour to optimize a correct distribution of footprint contact pressure able to ensure even wear and high mileage;
- Functional sipes and ejectors at the bottom of all grooves to enhance traction and prevent stone trapping;
- Good mileage with wider tread and deeper groove design;

SAILOR ASR79

Compound with high silica content guarantee great performances in a wide range of temperatures and conditions;



- Four ZIG-ZAG grooves and robust longitudinal ribs designed to reduced braking distance and to imporve road holding as well as driving safety;
- Innovative shoulder tread contour to optimize a correct distribution of footprint contact pressure able to ensure even wear and high mileage;
- Functional sipes and ejectors at the bottom of all grooves to enhance traction and prevent stone trapping;
- Sood mileage with wider tread and deeper groove design;
- Compound with high silica content guarantee great performances in a wide range of temperatures and conditions;

SAILOR ASR79II



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
295/60R22.5	18	150/147K	149/146L	15	√
245/70R19.5	18	144/142J		15	$\sqrt{}$
255/70R22.5	16	140/137M	140/140L	15	√
265/70R19.5	18	143/141J		13	$\sqrt{}$
275/70R22.5	18	148/145M	152/148J	15	$\sqrt{}$
275/80R22.5	18	149/146 L		15	√
295/80R22.5	18	152/149M		16.5	√
10R22.5	16	144/142M		15	√
11R22.5	16	146/143M	148/145L	15	√



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
12R22.5	18	152/149M		17	√

SAILOR SERIES REGIONAL USE



- Drive wheel suitable for regional and long haul;
- Better traction with deeper and bigger grooves and special tread block pitch design;
- We Great even wear performance with connected pattern block design;
- >> Less noise and more comfortable with irregular pattern block design;
- >> Better even wear performance with optimised shoulder design;
- M Good fatigue resistance with full penetration cord;
- Higher lifecycle performance with dual tread layer;

- >> Drive wheel suitable for regional and long haul;
- Better traction with deeper and bigger grooves and special tread block pitch design;
-) Great even wear performance with connected pattern block design;
- Less noise and more comfortable with irregular pattern block design;
- Better even wear performance with optimised shoulder design;
- Good fatigue resistance with full penetration cord;
- Higher lifecycle performance with dual tread layer;

SAILOR ADR78

SAILOR ADR78 II



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
245/70R19.5	18	144/142J		17	√



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
12R22.5	18	152/149M		22.5	√







- >> Excellent stone rejection performance with variable angle pattern groove
 - better tear resistance with stiffener of high rigidity pattern block;
- Special lateral block design offer better traction avoid irregular wear.
- Improve mileage with wider and deeper transverse groove .


- High loadability with optimised bead design;
 Good fatigue resistance with full penetration cord.
 Higher lifecycle performance with dual tread layer;

Neo Construct **G**





Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
425/65R22.5	20	165K		19	$\sqrt{}$
295/80R22.5	18	152/148K		20	$\sqrt{}$
315/80R22.5	18	158/150K	154/150L	16.5	$\sqrt{}$
325/95R24	22	162/160K		19	$\sqrt{}$
11R22.5	16	146/143L		20	$\sqrt{}$
13R22.5	18	156/150K	154/151L	18	$\sqrt{}$
7.00R16	14	118/114L		14.5	$\sqrt{}$
7.50R16	14	122/118L		15	$\sqrt{}$
8.25R16	16	128/124L		16	$\sqrt{}$

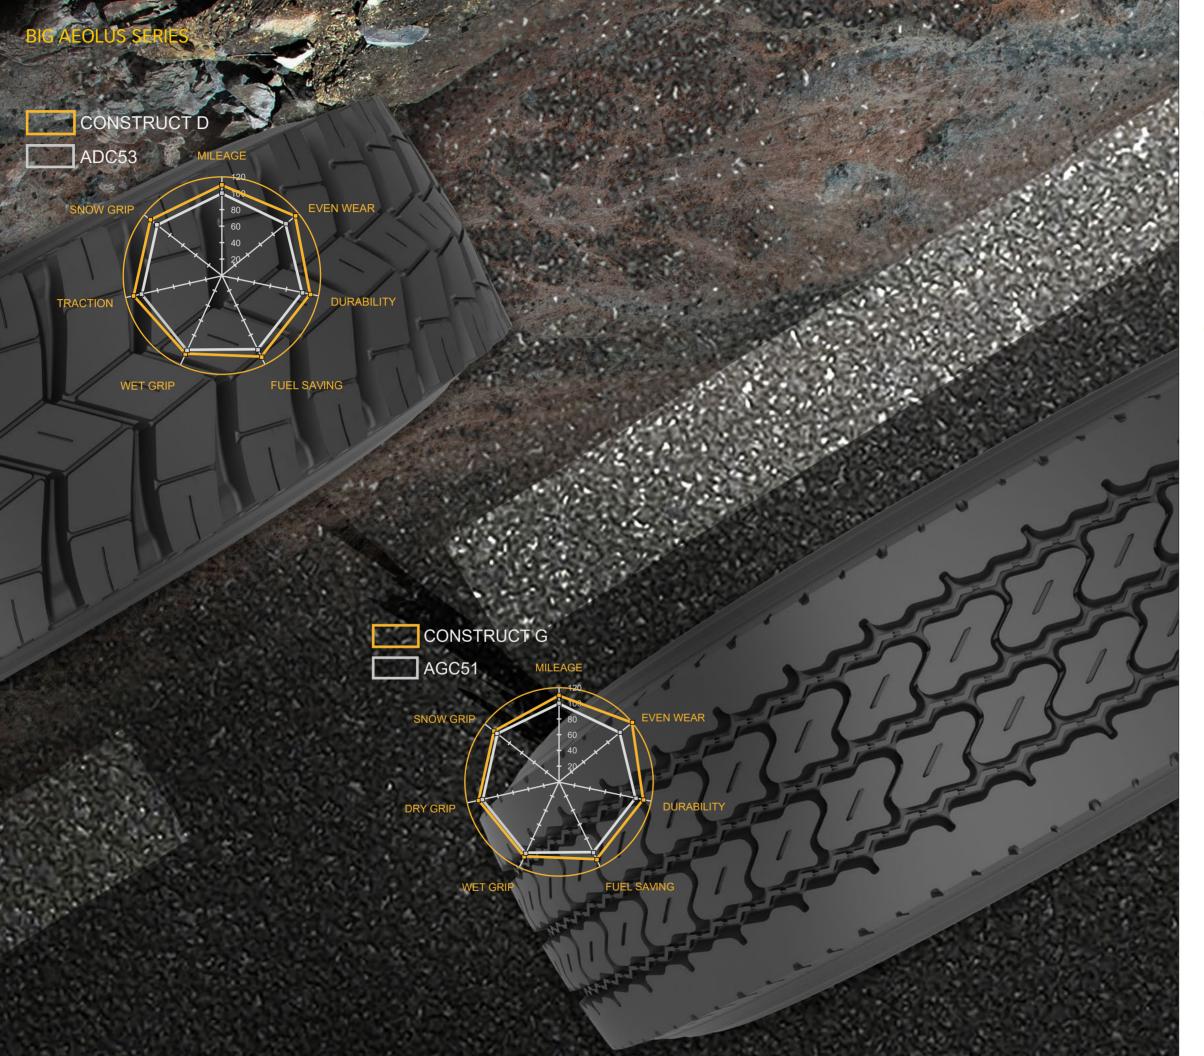





- Improve driving performance with wider and deeper transverse groove
- Improved stiffness of tread with connected pattern block design.
- Optimized footprint with advanced shoulder design high loadability with optimized bead design,
 Good fatigue resistance with full penetration cord
 Higher lifecycle performance with dual tread layer



- Robust circumferential ribs, rounded contour and a tread groove profile are optimised to guarantee greater resistance to lacerations;
- Optimum tread depth ensures a longer tyre life and excellent mileage
- Increased undertread to reduce the possibility of accidental casing damage;
- Increased resistance to tears and lacerations;
- >> Improved mileage in on/off mileage
- Tyre reinforcement version with good overloading capability.



- Improve driving performance with wider and deeper transverse groove
 Improved stiffness of tread with connected pattern block design
- Optimized footprint with advanced shoulder design
-)) high loadability with optimized bead design,
- Mean of the second of the s
-)) Higher lifecycle performance with dual tread layer



- Drive axle tyre for on/off road, designed specifically for overloading, short-medium distance, low-speed transportation.
- >> Transverse zigzag main groove and big block design for enhanced traction.
-)) Open shoulder and rib design reduce the heat generation while increasing the rigidity of the pattern block.
- >>> Excellent stone rejection performance with special patten design, reduce faults and operating costs
- >> Strengthen bead design to improve the strength of the tyre, more loaded and

Neo Construct **D** — Neo **AGC21**





Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
40F // FD00 F	00	4/5/			
425/65R22.5	20	165K		24	√
295/80R22.5	18	152/149L		22	
315/80R22.5	18	156/150K	154/150M	23	√
325/95R24	22	162/160K		20.6	$\sqrt{}$
11R22.5	16	146/143L	148/145K	24.5	√
12R22.5	18	152/149L		23.5	√
13R22.5	18	156/150K	154/151L	22	√



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
10.00R20	18	149/146K		16	√
11.00R20	18	152/149K		16	√
12.00R20	18	154/151K		16.5	√

Neo ADC51

Neo ADC55



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
10.00R20	18	149/146K		17.5	$\sqrt{}$
11.00R20	18	152/149K		18	√
12.00R20	18	154/151K		19	$\sqrt{}$



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
12.00R20	20	156/153K		21.5	√





NEO SERIES MINE

- A A A
- >> Suitable for relatively poor road surface application;
- With excellent grip ability and traction character;
- Low heat generating character and excellent loading capacity.

- Applicable for mining area and bad roads under low speed
- >> Excellent grip and self-cleaning performance
- Adjusted tread material composition specifically for anti-penetrating cut, antitearing, high wear resistance.
- 3 4 steel plies + 0 degree belt ply, reinforce anti-shock and anti-penetrating cut performance
- >> FRC high strength full penetrating steel which makes tyre stronger



- Medium and short distance series all-position products, suitable on ordinary and mixed roads
- Optimized contact patch design, which makes the ground pressure distribution uniform
- Zigzag groove design in the center groove, with excellent anti side slip performance, safer to use
- High strength casing material, effectively resist external impact and improve load capacity

Neo **AGM89**



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
11.00R20	18	152/149F		24	
12.00R20	20	156/153F		25	

AGC23




Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
8.25R16	18	132/128K		15	√
12.00R20	20	156/153K		17	

Neo Mine **G**



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
325/95R24	20	160/156F		31	

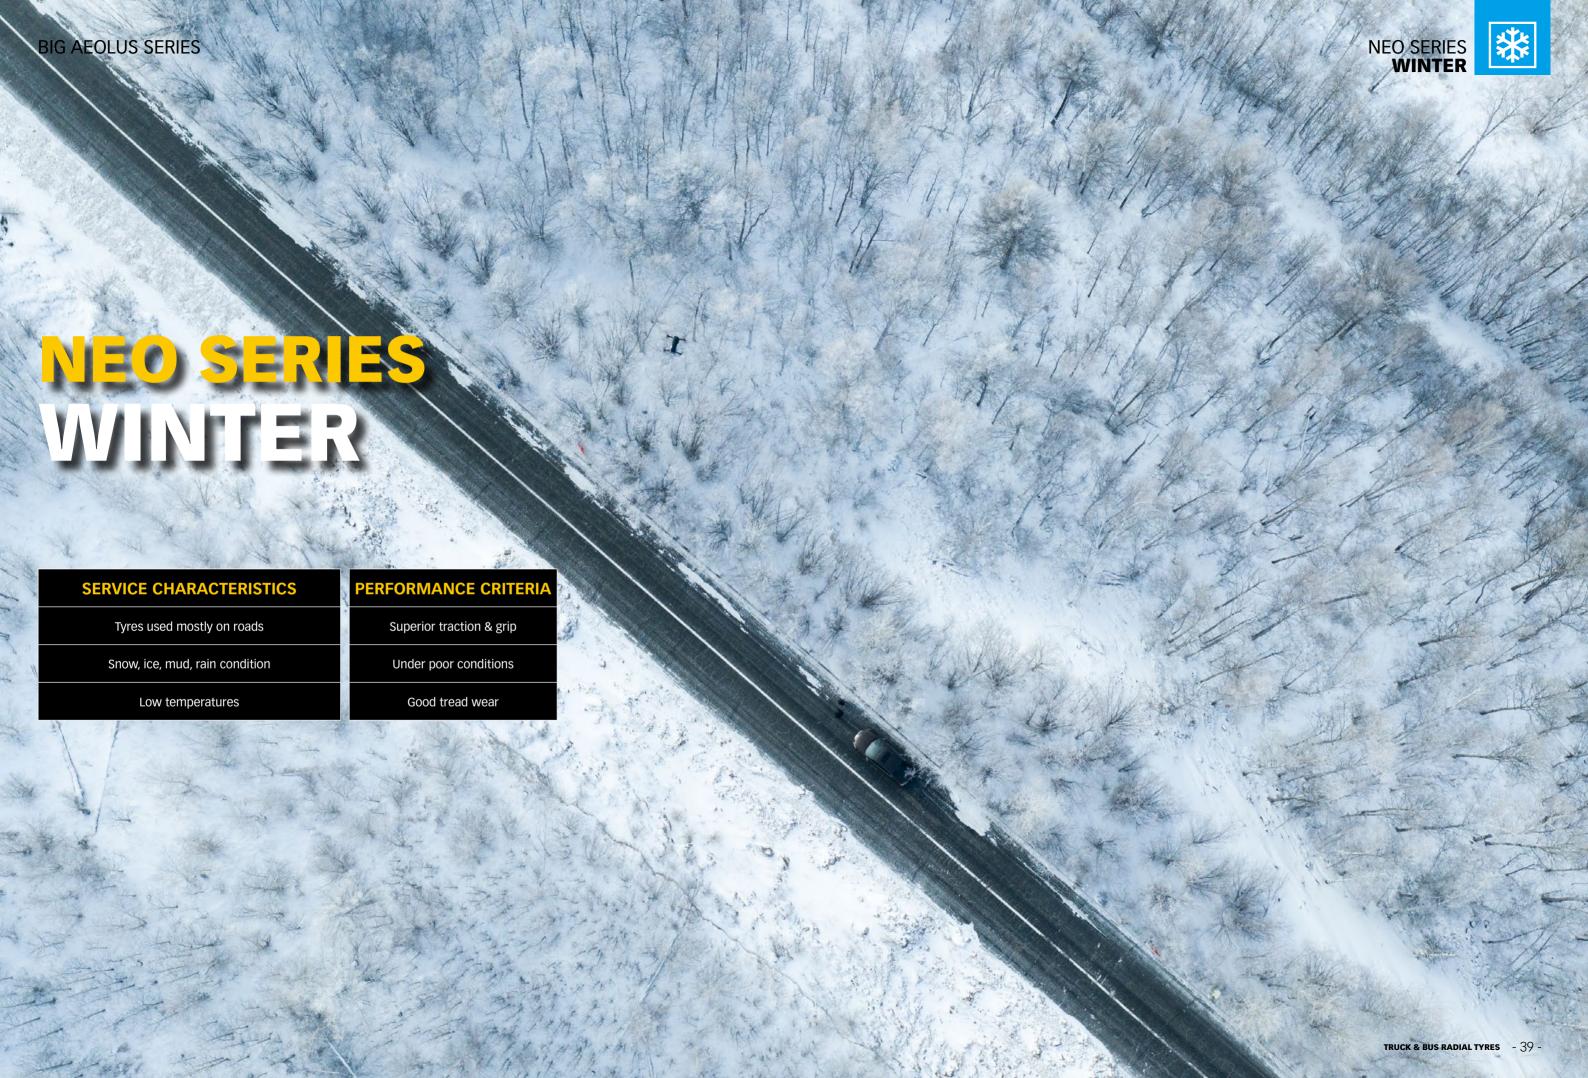

BIG AEOLUS SERIES



- Front wheel application in winter
- >> High density of transverse three-dimensional groove design, provides excellent grip on snow road, it has excellent antiskid performance;
- Four zig-zag pattern groove design to provide better steering and control performance.
- >> Excellent flexibility at low temperature with the unique tread compound design;
- Snow flake mark means the excellent winter tyre performance.
- Better performance of low rolling resistance and integrity with high
- Sood fatigue resistance with full penetration cord .
- >> Better noise performance with Optimized tread depth design

- Drive ayle in winter
- High density of transverse three-dimensional groove design, provides excellent grip on snow road, it has excellent antiskid performance;
- Excellent flexibility at low temperature with the unique tread compound design;
- Snow flake mark means the excellent winter tyre performance
- Better performance of low rolling resistance and integrity with high silica.
- Sood fatigue resistance with full penetration cord
- Better noise performance with Optimized tread depth design.

Neo Winter **S**



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
385/55R22.5	20	160K	158L	13.5	$\sqrt{}$
385/65R22.5	20	164K	158L	16.5	$\sqrt{}$
275/70R22.5	18	150/148J	152/148E	15	$\sqrt{}$
315/70R22.5	18	156/150L	154/150M	16.5	$\sqrt{}$
295/80R22.5	18	154/149M		15.5	$\sqrt{}$
315/80R22.5	18	158/150L	154/150M	16.5	√

Neo Winter **D**



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
245/70R19.5	18	144/142J		17	$\sqrt{}$
315/70R22.5	18	154/150L	152/148M	22	√



- Drive axle in winter
- High density of transverse three-dimensional groove design, provides excellent grip on snow road, it has excellent antiskid performance;
- Excellent flexibility at low temperature with the unique tread compound design;
- Snow flake mark means the excellent winter tyre performance
- Better performance of low rolling resistance and integrity with high silica.
- Good fatigue resistance with full penetration cord
- Better noise performance with Optimized tread depth design.

Neo Allseason **D**



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
11R22.5	16	146/143M		22.5	√









- Coach and bus suitable for all wheel tyres.
- Longer mileage with deeper tread depth,;
- Better driving performance with 4 pattern grooves design ;
- >> Improved heat emission with "s" groove and special deeper sipe design;
- Excellent sidewall protection design minimizes damage from curb.
- **)** Better performance of low rolling resistance and heat generation with high silica.
- Sood fatigue resistance with full penetration cord

- Drive axle use
- » Bead strength,increase the bead area pressure resistance;
- >> High-strength no-solder steel is used, more loading ability;
- Zig-Zag groove design, better water explusion and drive performance;
- Special shoulder design, even wear;
- Special stone ejection, excellent self-cleaning performance;
- >> Higher lifecycle performance with dual tread layer

- Suitable for all wheel tyres,urban and regional application used;
- >> Longer mileage with deeper tread depth;
- >> Better driving performance with 3 pattern grooves design ;
- >> Improved heat emission with "s" groove and special deeper sipe design;
- >> Excellent sidewall protection design minimizes damage from curb.
- >> Better performance of low rolling resistance and heat generation with high silica
- Sood fatigue resistance with full penetration cord

Neo Urban **G**



Neo Urban **D**



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
275/70R22.5	18	150/148J	152/148E	18	$\sqrt{}$
305/70R22.5	20	152/150L	154/150E	19	$\sqrt{}$
295/80R22.5	18	154/149M		18	√



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
275/70R22.5	18	148/145J	152/148E	20.5	$\sqrt{}$
11R22.5	16	146/143J	151/148E	20.6	$\sqrt{}$

SAILOR SERIES URBAN

Sailor AGB23



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
225/70R19.5	16	130/128L		15	√
245/70R19.5	18	144/142J		16	√
265/70R19.5	18	143/141J		16	$\sqrt{}$
275/70R22.5	18	150/148J	152/148E	20.5	√
215/75R17.5	16	127/124M		15	$\sqrt{}$
295/80R22.5	18	152/149J	154/150E	18.5	$\sqrt{}$
11R22.5	18	148/145J	151/148E	20	√




AEGLUS NORMAL SERIES

LONG HAUL



- Coach and bus suitable for all wheel tyres.
- Longer mileage with deeper tread depth,;
- Better driving performance with 4 pattern grooves design ;
- Improved fleat efficient is groove and special deeper sipe design
- Excellent sidewall protection design minimizes damage from curb.
- Better performance of low rolling resistance and heat generation with high silica
- Sood fatigue resistance with full penetration cord

ASL01





- Coach and bus suitable for all wheel tyres.
-)) Longer mileage with deeper tread depth,;
- Better driving performance with 4 pattern grooves design;
- >> Improved heat emission with "s" groove and special deeper sipe design;
- >>> Excellent sidewall protection design minimizes damage from curb.
- Better performance of low rolling resistance and heat generation with high silica.
- M Good fatigue resistance with full penetration cord



- Steer wheel, long distance application;
- Suitable for high speed on good road surface;
- Good-self-cleaning and anti-puncture character;
- With good drainage and anti-side-skid character;
- With good tear resistance character.

ASL06



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
9R22.5	14	136/134M		14.5	√
11R22.5	16	146/143M		15	
11R22.5	18	148/144M		15	
9.00R20	16	144/142L		14	

ASL67



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
11R22.5	16	146/143M		15	$\sqrt{}$
7.50R16	14	122/118M		12.5	$\sqrt{}$



-) Drive wheel, long distance application.
- >> With excellent anti-uneven wear and good wear resistance character;
- With good drainage and anti-side-skid character;

ADL58



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
295/75R22.5	14	144/141M		20.6	$\sqrt{}$
11R22.5	16	146/143L		20.6	





- >> Steer wheel for long distance application;
- >> Suitable for good road surface application
- With good drainage and anti-side-skid characte
- >>> Long mileage and anti-wearing character



- Steer wheel for long distance application;
- Suitable for good road surface application;
- With good drainage and anti-side-skid character;
- >> Long mileage and anti-wearing character

ASR05

ASR06



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
275/80R22.5	18	149/146L		14.5	

Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
295/80R22.5	18	152/149M		14	$\sqrt{}$
315/80R22.5	18	154/151M	156/150L	14	√
315/80R22.5	20	157/154M		14	$\sqrt{}$



- Steer wheel for regional use:
- Suitable for good road condition
- With excellent anti-side-skid character and drainage character
- Low rolling resistance character
- Strong shoulder pattern design and excellent anti- uneven wear character.



- Steer wheel for regional use;
- Suitable for good road condition;
- With excellent anti-side-skid character and drainage character;
- >> Low rolling resistance character.
- >> Strong shoulder pattern design and excellent anti- uneven wear character.



- Trailer wheel, long distance use;
- Suitable for high speed on good road surface;
- With good drainage and anti-side-skid character;
-) Low heat generating and anti-uneven-wear character.



- >> Trailer wheel, long distance us
- Suitable for high speed on good road surface;
- Low heat generating and anti-uneven-wear character.

ASR11

ASR24



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
12R22.5	18	152/149M		18	√



ASR28



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
245/70R19.5	14	133/131M		13.5	√

ASR29

Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
10.00R20	18	149/146L		14	



- Steer and trailer wheel, regional useSuitable for driving on good road condition;
- With excellent anti-side-skid character, low noise;
-)) Low rolling resistance and good high-speed character.

ASR30

ASR31



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
255/70R22.5	16	140/137M	140/140L	14.5	$\sqrt{}$
275/70R22.5	18	148/145M		15	$\sqrt{}$
11R22.5	16	146/143M	148/145L	16	
8.25R15	18	143/141G	141/140J	13	√
10.00R15	18	148/145G	146/144J	13.5	$\sqrt{}$

Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
12R22.5	18	152/149M		15	√



- Shorten braking distance and enhance driving safety with 4 zig-zag shape grooves and longitudinal ribs design
- 3 Good mileage with wider tread and deeper groove design.
- Great steering, dry and wet road handling performance with optimize groove and sipe design.
- Excellent stone rejection performance with variable angle pattern groove design .

 Good fatigue resistance with full penetration cord

 Higher lifecycle performance with dual tread layer

- Steer wheel for regional use, can also be used on drive and trailer wheel, suitable for driving on good condition
- Optimised contact shape provide outstanding performance for wear;
- >> Excellent drainage and steering performance, and 4 grooves pattern design;

ASR33+

ASR34+



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
385/65R22.5	24	164K		18	√



	Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
l	12R22.5	18	152/149M		16.5	

- Steer wheel for regional use;
- Suitable for driving on good condition;
- >> With excellent anti-side-skid character and drainage character

- Steer wheel for regional use;
- With excellent anti-side-skid character;
-) Low heat generating, excellent high speed driving character;
- >> Wide tread design provides good long mileage and anti-wearing

- Steer wheel for regional use;Low rolling resistance and low noise character;
-)> Low heat generating;
-) Good high-speed driving character.



- Drive wheel for regional use;
- With excellent grip ability and traction character;
- >> Long mileage, anti-wearing character and great high speed driving character

ASR35



				Tread	
Size	Ply Rating	LI/SS	Second. LI/SS	Depth (mm)	M+S
205/75R17.5	14	124/122M		13	√
215/75R17.5	18	135/133 J		13	
225/75R17.5	16	129/127M		13	
235/75R17.5	18	143/141J		13	√
6.50R16	12	110/105L		12	
7.00R15	12	113/109M		12.5	
7.00R16	14	118/114L		11	$\sqrt{}$
7.50R15	14	122/118L		12.5	
7.50R16	14	122/118L		12.5	$\sqrt{}$
7.50R16	16	125/121L		12.5	√
8.25R16	16	128/124M		14	

ASR65





Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
10R22.5	16	144/142M		14.5	$\sqrt{}$

ASR69



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S	
315/70R22.5	18	156/150L	154/150M	16.5	$\sqrt{}$	
315/70R22.5	20	154/151L		23	√	
295/80R22.5	18	154/149M		15.5	$\sqrt{}$	
315/80R22.5	18	158/150L	154/150M	16.5	√	
315/80R22.5	20	157/154M		16.5	√	

ADR26



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
275/80R22.5	16	149/146L	148/145M	20.6	√
11R22.5	16	148/144M		20.6	$\sqrt{}$
9.00R20	18	148/144J		17	√
10.00R20	18	149/146K		17.5	$\sqrt{}$
11.00R20	18	152/149L		18.5	√
12.00R20	22	158/155J		19	$\sqrt{}$

- Drive wheel for regional use;
- Suitable for highway and good condition;
- M+S pattern, with good grip character and traction character;
- Sood anti-wearing character, long mileage.

- Drive wheel, regional use;
- >> M+S pattern, with good traction character, excellent anti-wear character;
-)) Low heat generating, good high speed driving character.

- Drive wheel, regional use;
- M+S pattern, with good traction character, excellent anti-wear character;
-) Low heat generating, good high speed driving character.



- Drive wheel, regional use;
- Suitable for highway on good condition;
- With good grip and traction character;
-)) Good anti-wearing character, long mileage.

ADR35



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
245/70R17.5	18	136/134M		16.5	$\sqrt{}$
205/75R17.5	14	124/122M		16	√
235/75R17.5	16	132/130M		17	$\sqrt{}$
9.5R17.5	18	136/134M		16.5	√

ADR55



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
255/70R22.5	16	140/137M	140/140L	20	√
275/70R22.5	18	148/145M		20	√
10R22.5	16	144/142M		15.5	√

ADR57



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
11R22.5	16	146/143M		20.6	

ADR69



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
315/70R22.5	18	152/148M	154/150L	23	$\sqrt{}$
295/80R22.5	18	152/149M		22.5	$\sqrt{}$
315/80R22.5	18	154/151M	156/150L	23	$\sqrt{}$
315/80R22.5	20	157/154M		23	$\sqrt{}$



- Drive wheel for regional use;
- With excellent grip ability and traction character;
- Long mileage, anti-wearing character and great high speed driving character





- Steer wheel for regional use
- >> Suitable for normal and good road condition;
- Sood anti-wearing character;
- With excellent tear resistance and anti-even wear character.



ATR65



AGR12



AGR32



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	ECE R54	Inmetro	LATU	Columbia
385/55R19.5	18	156J		15	$\sqrt{}$	$\sqrt{}$		
385/65R22.5	20	160K	158L	16.8	√	√	√	√
9.5R17.5	18	143/141J		13		√	√	√





Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	ECE R54	Inmetro	LATU	Columbia
315/80R22.5	20	161/154K		18.5		√	√	$\sqrt{}$
315/80R22.5	18	154/151L	156/150K	16.5		√		√
315/80R22.5	20	161/154K		16.5			√	
11R22.5	16	146/143L		18.5			$\sqrt{}$	$\sqrt{}$
11.00R20	18	152/149L		16.5	√		√	$\sqrt{}$

Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)		Inmetro	LATU	Columbia
12R22.5	18	152/149L		15	√	√	√	√





- Suitable for mix road and relatively poor road condition;
- Excellent traction character and passing though character;
- Good anti-crack and anti-puncture character.

 M+S pattern, great traction and driving performance

ADC09



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
7.50R16	14	122/118L		16	$\sqrt{}$
10.00R20	18	149/146K		17	√
11.00R20	18	152/149K		18	√
12.00R20	18	154/151K		18	√



- Drive wheel for mixed road surface and poor road condition.
- Open shoulder and groove design is good at heat dissipation, it reduces tyre
- Deep pattern design provides long service life
 Optimized shape of block pattern design improves the tyre wear resistance
- Reinforced tyre carcass and bead improves the tyre load capacity
- >> Special tread compound offers excellent wear resistance and high mileage.

- >> Drive wheel for mixed road surface and poor road condition.
- Big block design help increase driving ability on mixed road condition and improve grip and traction performance.
- Open shoulder design prevents uneven wear and improves heat dissipation
- >> Reinforced tyre carcass and bead improves the tyre load capacity
- Special tread compound offers excellent wear resistance and high mileage.

ADC48



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
10.00R20	18	149/146K		20.5	√

ADC52



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
295/80R22.5	18	152/149 K		24	$\sqrt{}$
315/80R22.5	18	156/150K		23	$\sqrt{}$
315/80R22.5	20	157/154K		23	$\sqrt{}$
11R22.5	16	146/143K		24	$\sqrt{}$
13R22.5	18	154/151K	156/150G	24	$\sqrt{}$
10.00R20	18	149/146D		20.5	$\sqrt{}$



ADC53

- Drive wheel suitable for mixed road surface and poor road condition.
- **)** Double nylon reinforce for bead improves load capacity.
- >> Excellent bead endurance performance to overcome overload and underinflation
- The application of high intensity HT cord increases 30% carcass strength comparing with the normal cord.
- Optimized design of the tyre tread ensures even wear. Good performance of grip, traction and drainage.
-)) Drive wheel, suitable for mixed road surface and poor road condition
- M+S pattern with great grip ability.
- Excellent anti-wear character and heat dispassion ability.

ADC57



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
275/70R22.5	18	148/145L		17.5	$\sqrt{}$
295/80R22.5	18	152/149L		19	$\sqrt{}$
315/80R22.5	18	154/151M	156/150L	19.5	$\sqrt{}$
315/80R22.5	20	157/154M		19.5	$\sqrt{}$
11R22.5	16	146/143L	148/145K	22.5	$\sqrt{}$
12R22.5	18	152/149L		19.5	$\sqrt{}$
11.00R20	18	152/149K		18.5	$\sqrt{}$
12.00R20	18	154/151K		20.6	$\sqrt{}$
12.00R20	20	156/153K		20.6	$\sqrt{}$
12.00R20	22	158/155J		20.6	√
12.00R24	20	160/157K		20.6	√



- Medium and short distance series drive positioning products, suitable on mixed road and bad road
- Optimized tyre shoulder structure, low heat generation and good heat dissipation
- With the design of integral connection of pattern block and open wide bottom pattern groove, the tyre has good grip performance and self-cleaning performance
- With the design of rubber covered steel wire, it can effectively isolate casing and bead steel wire, and the strength of bead toe is enhanced.

- All Position Product for Mixed Road Use
- With powerful grip ability and excellent traction character;
- >> Low heat generating character and excellent loading capacity.

ADC59



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
11.00R20	18	152/149K		18	√
12.00R20	20	156/153K		19	$\sqrt{}$

AGC28



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
385/65R22.5	20	164K	158L	16.8	√
425/65R22.5	20	165K		16.5	$\sqrt{}$
445/65R22.5	20	169K		16.5	$\sqrt{}$
245/70R17.5	18	143/141J	144/144F	16.5	$\sqrt{}$
255/70R22.5	16	140/137M	140/140L	17.5	$\sqrt{}$
265/70R19.5	18	143/141J		17.5	$\sqrt{}$
275/70R22.5	18	148/145M		17.5	√
215/75R17.5	18	135/133J		15.5	$\sqrt{}$
235/75R17.5	18	143/141J		16.5	$\sqrt{}$
10.00R20	18	149/146K		20	$\sqrt{}$



- Steer, drive and trailer wheel
- Suitable for relatively poor road condition;
 Great anti-uneven wear ability and high tear resistance
-) Low heat generating and great rear resistance character.

AGC08



3		
6-6-		
111		10
	A Comment	

Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
295/80R22.5	18	152/149L		17	√
315/80R22.5	18	154/151L	156/150K	16.5	$\sqrt{}$
315/80R22.5	20	161/154K		16.5	√
315/80R22.5	22	160/157L		16.5	√
10R22.5	16	144/142L		15.5	√
11R22.5	16	146/143L	148/145K	17	√
11R22.5	18	149/146L		17	√
12R22.5	18	152/149L		17	√
7.00R16	14	118/114L		13	
7.50R16	14	122/118L		13	√
8.25R16	16	128/124L		13	√
8.25R16	18	132/128K		13	√
8.25R20	16	139/137K		14.5	√
9.00R20	16	144/142K		15.5	√
10.00R20	18	149/146K		16.5	√
11.00R20	18	152/149K		17	√
12.00R20	18	154/151K		17.5	√
12.00R20	20	156/153K		17.5	√
12.00R24	20	160/157K		17.5	√



- Suitable for mixed road and relatively poor road condition;
- >> Great grip ability and excellent traction character;



- >> Good anti-crack and tear resistance character;
- Low heat generating and great loading capacity.
 Excellent high-speed driving character.

AGC51

AGC53







Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
13R22.5	20	156/153L		18	√





- Suitable for relatively poor road surface application; With excellent grip ability and traction character;
- >> Low heat generating character and excellent loading capacity.

- Applicable for mining area and bad roads under low speed
- Specific tread material composition and big tread block which increase anti-penetrating cut performance and driving capability
- Reinforced bead design and high strength casing cord which provides excellent loading performance
- 4 steel belt design, which increases 30% anti-penetrating cut performance
 Thicker anti-wear block design, effectively protect casing



- Trailer and driving wheel, off road use;
- Suitable for transporting at low-speed on poor road, such as mining road;
 With excellent grip ability and traction character;
- Sood self-cleaning, anti-wearing and anti-puncture characteristics.

AGM10 —



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
11R22.5	16	146/143G		22	
12R22.5	18	152/149G		22	
13R22.5	18	154/151G	156/150F	22.5	
9.00R20	16	144/142F		22	
10.00R20	18	149/146F		22	
11.00R20	18	152/149F		22	
12.00R20	18	154/151F		23	
12.00R20	20	156/153F		23	
12.00R20	22	158/155F		23	
12.00R24	18	158/155F		23	
12.00R24	20	160/157F		23	

AGM86



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
11.00R20	18	152/149F		24	
12.00R20	18	154/151F		24.5	

AGM88



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
7.00R16	14	118/114K		16.5	
7.50R16	14	122/118L		16.5	
8.25R16	16	128/124J		18	
8.25R20	16	139/137F		20	
9.00R20	16	144/142F		23	
10.00R20	18	149/146F		23.5	
11.00R20	18	152/149F		24	
12.00R20	18	154/151F		24.5	
12.00R20	20	156/153F		24.5	
12.00R20	22	158/155F		24.5	

AEOLUS NORMAL SERIES



- Drive wheel, on/off road use;
- >> Suitable for low speed on poor road condition;
- Excellent grip and traction characteristic;
- Strong anti-wear and anti-puncture resistance characteristic;

AGP59



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
12.00R20	22	158/155G		23	



AEOLUS NORMAL SERIES



- Drive wheel, suitable for snow road;
 High-density transverse grooves provide good anti-skid character;
 Special tread compound keep rubber softness in low temperature, with good grip character;
 M+S pattern, with good traction character and long mileage character.

ADW80



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
315/80R22.5	18	154/151M	156/150L	24	$\sqrt{}$





- Drive wheel, urban road use;
- High wear resistance performance provides good traction performance;
- The optimized footprint provides the good handling performance and the long life use;
- >> Special stone ejector platforms design, prevent the road hazard

- High wear resistance performance provides good traction performance; The optimized footprint provides the good handling performance and the long
- Special stone ejector platforms design, prevent the road hazard



- Steer and trailer wheel, urban road use,
- Suitable for high speed on good road condition

AGB20



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
275/70R22.5	18	150/148J	152/148E	20	$\sqrt{}$
215/75R17.5	18	135/133J		13	$\sqrt{}$
295/80R22.5	18	152/149J	154/150E	20	$\sqrt{}$
10R22.5	16	144/142M	146/144E	19	$\sqrt{}$

AGB20+



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
11R22.5	18	148/145J	151/148E	20	$\sqrt{}$

AGB21



Size	Ply Rating	LI/SS	Second. LI/SS	Tread Depth (mm)	M+S
9R22.5	14	136/134M		14.5	
11R22.5	16	146/143M	148/145L	16	

TECHNICAL SPECIFICATIONS

BIG AEOLUS SERIES DATA

Size	Pattern	Ply Rating	LI/SS	Second. LI/	Single Max. Load(kg)	DualMax. Load(kg)	Single(kPa)	Dual (kPa)	Tread depth	M+S
385/55R22.5	Neo Allroads S+	20	160K	158L	4500		900		15	√
385/55R22.5	Neo Allroads T2	20	160K	158L	4500		900		15.5	√
385/55R22.5	Neo Winter S	20	160K	158L	4500		900		13.5	√
295/60R22.5	ASR79	18	150/147K	149/146L	3350	3075	900	900	15	√
295/60R22.5	Neo Allroads D+	18	150/147K	149/146L	3350	3075	900	900	18	√
315/60R22.5	Neo Allroads D+	20	152/148L		3550	3150	900	900	19	√
385/65R22.5	Neo Allroads S+	20	164K	158L	5000		900		15	√
385/65R22.5	Neo Allroads S+	24	164K		5000		930		15	√
385/65R22.5	Neo Allroads T2	20	164K	158L	5000		900		16.5	√
385/65R22.5	Neo Winter S	20	164K	158L	5000		900		16.5	√
425/65R22.5	Neo Allroads T2	20	165K		5150		825		16.5	√
425/65R22.5	Neo Construct D	20	165K		5150		825		24	√
425/65R22.5	Neo Construct G	20	165K		5150		825		19	√
445/65R22.5	Neo Allroads T2	20	169K		5800		900		16.5	√
225/70R19.5	AGB23	16	130/128L		1900	1800	830	830	15	√
225/70R19.5	Neo Allroads D	14	128/126M		1800	1700	760	760	15	- √
245/70R17.5	Neo Allroads D	18	136/134M		2240	2120	850	850	15.5	√
245/70R17.5	Neo Allroads S	18	134/132M		2120	2000	900	900	15	√
245/70R17.5	Neo Allroads T2	18	143/141J	146/146F	2725	2575	875	875	11	√ √
245/70R19.5	ADR78	18	144/142J		2800	2650	900	900	17	√ √
245/70R19.5	AGB23	18	144/142J		2800	2650	900	900	16	√ √
245/70R19.5	ASR79	18	144/142J		2800	2650	900	900	15	√
245/70R19.5	Neo Allroads D	18	144/142J		2800	2650	900	900	17	√ √
245/70R19.5	Neo Winter D	18	144/142J		2800	2650	900	900	17	√ √
255/70R22.5	ASR79	16	140/137M	140/140L	2500	2300	830	830	15	√ √
265/70R19.5	AGB23	18	143/141J	140/ 1402	2725	2575	830	830	16	√ √
265/70R19.5	ASR79	18	143/141J		2725	2575	830	830	13	√ √
265/70R19.5	Neo Allroads D	16	140/138M		2500	2360	830	830	16.5	V √
265/70R19.5	Neo Allroads D	18	143/141J	146/146F	2725	2575	830	830	16.5	v -/
265/70R19.5	Neo Allroads S	16	140/138M	140/ 1401	2500	2360	830	830	13	√ √
265/70R19.5	Neo Allroads T2	18	140/136W	146/146F	2725	2575	850	850	13	V √
275/70R22.5	AGB23	18	150/148J	152/148E	3350	3150	900	900	20.5	V √
275/70R22.5 275/70R22.5	ASR79	18	148/145M	152/148J	3150	2900	900	900	15	V √
			148/145J						20.5	,
275/70R22.5	Neo Urban D	18		152/148E	3150	2900	900 900	900		√ /
275/70R22.5	Neo Urban G Neo Winter S	18	150/148J	152/148E 152/148E	3350	3150			18	√ /
275/70R22.5		18	150/148J		3350	3150	900	900	15	√ /
285/70R19.5	Neo Allroads D	16	146/144L	145/143M	3000	2800	850	850	16	V
285/70R19.5	Neo Allroads S	16	146/144L	145/143M	3000	2800	850	850	14	٧
285/70R19.5	Neo Allroads T2	18	150/148J	454/4505	3350	3150	900	900	14.5	V
305/70R22.5	Neo Urban G	20	152/150L	154/150E	3550	3350	900	900	19	√ ,
315/70R22.5	Neo Allroads D+	18	154/150L	152/148M	3750	3350	900	900	21	√ ,
315/70R22.5	Neo Allroads S	18	156/150L	154/150M	4000	3350	900	900	15.5	√ ,
315/70R22.5	Neo Winter D	18	154/150L	152/148M	3750	3350	900	900	22	√
315/70R22.5	Neo Winter S	18	156/150L	154/150M	4000	3350	900	900	16.5	√ ,
205/75R17.5	Neo Allroads D	14	124/122M		1600	1500	760	760	14	√
215/75R17.5	AGB23	16	127/124M		1750	1600	830	830	15	√
215/75R17.5	Neo Allroads D	18	135/133J		2180	2060	850	850	15	√
215/75R17.5	Neo Allroads S	18	135/133J		2180	2060	850	850	13	√
215/75R17.5	Neo Allroads T2	18	135/133J		2180	2060	850	850	12.5	√
225/75R17.5	Neo Allroads D	16	129/127M		1850	1750	830	830	14	√
235/75R17.5	Neo Allroads D	16	132/130M		2000	1900	775	775	16	√
235/75R17.5	Neo Allroads D	18	143/141J		2725	2575	875	875	16	√
235/75R17.5	Neo Allroads S	16	132/130M		2000	1900	775	775	13	√
235/75R17.5	Neo Allroads S	18	143/141J		2725	2575	830	830	13	√
235/75R17.5	Neo Allroads T2	18	143/141J	144/144F	2725	2575	875	875	12.5	√

TECHNICAL SPECIFICATIONS

BIG AEOLUS SERIES DATA

Size	Pattern	Ply Rating	LI/SS	Second. LI/	Single Max. Load(kg)	DualMax. Load(kg)	Single(kPa)	Dual (kPa)	Tread depth	M+S
295/75R22.5	Neo Fuel D3	16	146/143M		3000	2725	830	830	20.6	$\sqrt{}$
295/75R22.5	Neo Fuel G3	16	146/143M		3000	2725	830	830	15	$\sqrt{}$
275/80R22.5	ASR79	18	149/146 L		3250	3000	900	900	15	$\sqrt{}$
295/80R22.5	AGB23	18	152/149J	154/150E	3550	3250	900	900	18.5	$\sqrt{}$
295/80R22.5	ASR79	18	152/149M		3550	3250	900	900	16.5	$\sqrt{}$
295/80R22.5	Neo Allroads D+	18	152/148M		3550	3150	850	850	22	$\sqrt{}$
295/80R22.5	Neo Allroads S	18	154/149M		3750	3250	900	900	16.5	$\sqrt{}$
295/80R22.5	Neo Construct D	18	152/149L		3550	3250	900	900	22	$\sqrt{}$
295/80R22.5	Neo Construct G	18	152/148K		3550	3150	850	850	20	
295/80R22.5	Neo Urban G	18	154/149M		3750	3250	900	900	18	$\sqrt{}$
295/80R22.5	Neo Winter S	18	154/149M		3750	3250	900	900	15.5	
315/80R22.5	Neo Allroads D+	18	156/150L	154/150M	4000	3350	850	850	21	$\sqrt{}$
315/80R22.5	Neo Allroads S	18	158/150L	154/150M	4250	3350	900	900	16	√
315/80R22.5	Neo Construct D	18	156/150K	154/150M	4000	3350	850	850	23	$\sqrt{}$
315/80R22.5	Neo Construct G	18	158/150K	154/150L	4250	3350	900	900	16.5	√
315/80R22.5	Neo Winter S	18	158/150L	154/150M	4250	3350	900	900	16.5	$\sqrt{}$
325/95R24	Neo Construct D	22	162/160K		4750	4500	850	850	20.6	√
325/95R24	Neo Construct G	22	162/160K		4750	4500	850	850	19	$\sqrt{}$
325/95R24	Neo Mine G	20	160/156F		4500	4000	850	850	31	
10R22.5	ASR79	16	144/142M		2800	2650	900	900	15	V
11R22.5	AGB23	18	148/145J	151/148E	3150	2900	850	850	20	√
11R22.5	ASR79	16	146/143M	148/145L	3000	2725	830	830	15	√
11R22.5	Neo Allroads D+	16	146/143L		3000	2725	830	830	22.5	√ √
11R22.5	Neo Allseason D	16	146/143M		3000	2725	830	830	22.5	V
11R22.5	Neo Construct D	16	146/143L	148/145K	3000	2725	830	830	24.5	√ √
11R22.5	Neo Construct G	16	146/143L		3000	2725	830	830	20	V
11R22.5	Neo Fuel D3	16	146/143L		3000	2725	830	830	20.5	\ \
11R22.5	Neo Fuel G3	16	146/143M	148/145K	3000	2725	830	830	15	√ √
11R22.5	Neo Urban D	16	146/143J	151/148E	3000	2725	830	830	20.6	V
12R22.5	ADR78	18	152/149M		3550	3250	930	930	22.5	√ √
12R22.5	AGR29	18	152/149L		3550	3250	930	930	18	√ √
12R22.5	ASR79	18	152/149M		3550	3250	930	930	17	√ √
12R22.5	Neo Construct D	18	152/149L		3550	3250	930	930	23.5	√ √
13R22.5	Neo Construct D	18	156/150K	154/151L	4000	3350	875	875	22	v ./
13R22.5	Neo Construct G	18	156/150K	154/151L	4000	3350	875	875	18	ν √
7.00R16	Neo Construct G	14	118/114L		1320	1180	770	770	14.5	v 1
7.50R16	Neo Construct G	14	122/118L		1500	1320	770	770	15	ν √
8.25R16	AGC23	18	132/128K		2000	1800	870	870	15	√ √
8.25R16	Neo Construct G	16	128/124L		1800	1600	770	770	16	√ √
10.00R20	Neo ADC51	18	149/146K		3250	3000	930	930	17.5	√ √
10.00R20	Neo AGC21	18	149/146K		3250	3000	930	930	16	√ √
11.00R20	Neo ADC51	18	152/149K		3550	3250	930	930	18	√ √
11.00R20	Neo AGC21	18	152/149K		3550	3250	930	930	16	V
11.00R20	Neo AGM89	18	152/149K 152/149F		3550	3250	930	930	24	V
12.00R20	AGC23	20	152/149F 156/153K		4000	3650	900	900	17	
										-/
12.00R20	Neo ADC51	18	154/151K		3750	3450	830	830	19	√ /
12.00R20	Neo ADC55	20	156/153K		4000	3650	900	900	21.5	√ /
12.00R20	Neo AGC21	18	154/151K		3750	3450	830	830	16.5	$\sqrt{}$
12.00R20	Neo AGM89	20	156/153F		4000	3650	900	900	25	

TECHNICAL SPECIFICATIONS

AEOLUS NORMAL SERIES DATA

Size	Pattern	Ply Rating	LI/SS	Second. LI/SS	Single Max. Load(kg)	DualMax. Load(kg)	Single(kPa)	Dual (kPa)	Tread depth	M+S
								` ''	mm	,
385/55R19.5	ATR65	18	156J		4000		900		15	√
385/65R22.5	AGC28	20	164K	158L	5000		900		16.8	√ /
385/65R22.5	ASR33+	24	164K	450	5000		930		18	√ /
385/65R22.5	ATR65	20	160K	158L	4500		900		16.8	√ /
425/65R22.5	AGC28	20	165K		5150		830		16.5	V
445/65R22.5	AGC28	20	169K		5800	2420	900	000	16.5	√ /
245/70R17.5	ADR35	18	136/134M	144/144	2240	2120	900	900	16.5	V
245/70R17.5	AGC28 ASR28	18 14	143/141J 133/131M	144/144F	2725	2575 1950	900	900 760	16.5	√ /
245/70R19.5 255/70R22.5	ADR55		140/137M	140/140L	2060		760 830		13.5 20	V
255/70R22.5 255/70R22.5	AGC28	16 16	140/137M	140/140L 140/140L	2500 2500	2300 2300	830	830 830	17.5	٧
255/70R22.5	ASR30	16	140/137M	140/140L	2500	2300	830	830	14.5	V √
265/70R19.5	AGC28	18	143/141J	140/ 140L	2725	2575	830	830	17.5	v 2/
275/70R22.5	ADC53	18	148/145L		3150	2900	900	900	17.5	√ √
275/70R22.5	ADR55	18	148/145M		3150	2900	900	900	20	۷ ا
275/70R22.5	AGB20	18	150/148J	152/148E	3350	3150	900	900	20	√ √
275/70R22.5	AGC28	18	148/145M		3150	2900	900	900	17.5	√ √
275/70R22.5	ASR30	18	148/145M		3150	2900	900	900	15	√ √
315/70R22.5	ADR69	18	152/148M	154/150L	3450	3150	830	830	23	√
315/70R22.5	ASR69	18	156/150L	154/150M	4000	3350	830	830	16.5	√
315/70R22.5	ASR69	20	154/151L		3750	3450	930	930	23	√
205/75R17.5	ADR35	14	124/122M		1550	1450	760	760	16	√
205/75R17.5	ASR35	14	124/122M		1600	1500	760	760	13	√
215/75R17.5	AGB20	18	135/133J		2180	2060	830	830	13	√
215/75R17.5	AGC28	18	135/133J		2180	2060	830	830	15.5	√
215/75R17.5	ASR35	18	135/133 J		2180	2060	830	830	13	√
225/75R17.5	ASR35	16	129/127M		1850	1750	830	830	13	√
235/75R17.5	ADR35	16	132/130M		2000	1900	830	830	17	
235/75R17.5	AGC28	18	143/141J		2725	2575	900	900	16.5	√
235/75R17.5	ASR35	18	143/141J		2725	2575	830	830	13	$\sqrt{}$
295/75R22.5	ADL58	14	144/141M		2800	2575	760	760	20.6	√
275/80R22.5	ADR26	16	149/146L	148/145M	3075	2800	830	830	20.6	√
275/80R22.5	ASR05	18	149/146L		3250	3000	900	900	14.5	√
295/80R22.5	ADC52	18	152/149 K		3550	3250	900	900	24	√
295/80R22.5	ADC53	18	152/149L		3550	3250	900	900	19	√
295/80R22.5	ADR69	18	152/149M		3550	3250	900	900	22.5	√
295/80R22.5	AGB20	18	152/149J	154/150E	3550	3250	900	900	20	√
295/80R22.5	AGC08	18	152/149L		3550	3250	900	900	17	√
295/80R22.5	ASR06	18	152/149M		3550	3250	900	900	14	√ /
295/80R22.5	ASR69	18	154/149M		3750	3250	900	900	15.5	√ /
315/80R22.5	ADC52	18	156/150K		4000	3350	830	830	23	√ /
315/80R22.5	ADC52	20	157/154K	15//150	4125	3750 3450	900 830	900	23	٧
315/80R22.5 315/80R22.5	ADC53 ADC53	18 20	154/151M 157/154M	156/150L	3750 4125	3750	900	830 900	19.5 19.5	√ /
315/80R22.5	ADR69	18	154/151M	156/150L	3750	3450	830	830	23	√ √
315/80R22.5	ADR69	20	157/154M	130/ 130L	4125	3750	900	900	23	V √
315/80R22.5	ADW80	18	154/151M	156/150L	3750	3450	830	830	24	√ √
315/80R22.5	AGC08	18	154/151L	156/150K	3750	3450	830	830	16.5	√ √
315/80R22.5	AGC08	20	161/154K		4625	3750	900	900	16.5	√ √
315/80R22.5	AGC08	22	160/157L		4535	4125	900	900	16.5	√ √
315/80R22.5	AGC51	20	157/154L		4125	3750	900	900	16.5	√ √
315/80R22.5	AGR26	20	161/154K		4625	3750	900	900	18.5	
315/80R22.5	AGR26+	18	154/151L	156/150K	3750	3450	830	830	16.5	
315/80R22.5	AGR26+	20	161/154K		4625	3750	900	900	16.5	
315/80R22.5	ASR06	18	154/151M	156/150L	3750	3450	830	830	14	$\sqrt{}$
315/80R22.5	ASR06	20	157/154M		4125	3750	900	900	14	√
315/80R22.5	ASR69	18	158/150L	154/150M	4250	3350	830	830	16.5	$\sqrt{}$
315/80R22.5	ASR69	20	157/154M		4125	3750	900	900	16.5	√
9.5R17.5	ADR35	18	136/134M		2240	2120	900	900	16.5	$\sqrt{}$
9.5R17.5	ASR24	18	136/134M		2240	2120	900	900	13	$\sqrt{}$
9.5R17.5	ATR65	18	143/141J		2725	2575	900	900	13	
9R22.5	AGB21	14	136/134M		2240	2120	830	830	14.5	
9R22.5	ASL06	14	136/134M		2240	2120	830	830	14.5	$\sqrt{}$

TECHNICAL SPECIFICATIONS

AEOLUS NORMAL SERIES DATA

						1				
Size	Pattern	Ply Rating	LI/SS	Second. LI/SS	Single Max. Load(kg)	DualMax. Load(kg)	Single(kPa)	Dual (kPa)	Tread depth mm	M+S
10R22.5	ADR55	16	144/142M		2800	2650	900	900	15.5	√
10R22.5	AGB20	16	144/142M	146/144E	2800	2650	900	900	19	√
10R22.5	AGC08	16	144/142L		2800	2650	900	900	15.5	√
10R22.5	ASR65	16	144/142M		2800	2650	900	900	14.5	√
11R22.5	ADC52	16	146/143K		3000	2725	830	830	24	√
11R22.5	ADC53	16	146/143L	148/145K	3000	2725	830	830	22.5	√
11R22.5	ADL58	16	146/143L		3000	2725	830	830	20.6	√
11R22.5	ADR26	16	148/144M		3150	2800	830	830	20.6	√
11R22.5	ADR57	16	146/143M		3000	2725	830	830	20.6	√
11R22.5	AGB20+	18	148/145J	151/148E	3150	2900	850	850	20	√
11R22.5	AGB21	16	146/143M	148/145L	3000	2725	830	830	16	
11R22.5	AGC08	16	146/143L	148/145K	3000	2725	830	830	17	$\sqrt{}$
11R22.5	AGC08	18	149/146L		3250	3000	930	930	17	√
11R22.5	AGM10	16	146/143G		3000	2725	830	830	22	
11R22.5	AGR26	16	146/143L		3000	2725	830	830	18.5	
11R22.5	ASL06	16	146/143M		3000	2725	830	830	15	
11R22.5	ASL06	18	148/144M		3150	2800	850	850	15	
11R22.5	ASL67	16	146/143M		3000	2725	830	830	15	
11R22.5	ASR30	16	146/143M	148/145L	3000	2725	830	830	16	
12R22.5	ADC53	18	152/149L		3550	3250	930	930	19.5	$\sqrt{}$
12R22.5	AGC08	18	152/149L		3550	3250	930	930	17	√
12R22.5	AGM10	18	152/149G		3550	3250	930	930	22	
12R22.5	AGR12	18	152/149L		3550	3250	930	930	17.5	√
12R22.5	AGR32	18	152/149L		3550	3250	930	930	15	√
12R22.5	ASL01	18	152/149M		3550	3250	930	930	17.5	√
12R22.5	ASR11	18	152/149M		3550	3250	930	930	18	√
12R22.5	ASR31	18	152/149M		3550	3250	930	930	15	√
12R22.5	ASR34+	18	152/149M		3550	3250	930	930	16.5	
13R22.5	ADC52	18	154/151K	156/150G	3750	3450	830	830	24	√
13R22.5	AGC53	20	156/153L		4000	3650	930	930	18	√
13R22.5	AGM10	18	154/151G	156/150F	3750	3450	830	830	22.5	
6.50R16	AGC51	12	110/105K		1060	925	670	670	13	
6.50R16	ASR35	12	110/105L		1060	925	670	670	12	
7.00R15	ASR35	12	113/109M		1150	1030	670	670	12.5	
7.00R16	ADC57	14	118/114K		1320	1180	770	770	16	√
7.00R16	AGC08	14	118/114L		1320	1180	770	770	13	
7.00R16	AGM88	14	118/114K		1320	1180	770	770	16.5	
7.00R16	ASR35	14	118/114L		1320	1180	770	770	11	$\sqrt{}$
7.50R15	ASR35	14	122/118L		1500	1320	770	770	12.5	
7.50R16	ADC09	14	122/118L		1500	1320	770	770	16	
7.50R16	ADC57	14	122/118 L		1500	1320	770	770	16	V
7.50R16	AGC08	14	122/118L		1500	1320	770	770	13	√
7.50R16	AGC51	14	122/118L		1500	1320	770	770	15	√
7.50R16	AGM88	14	122/118L		1500	1320	770	770	16.5	
7.50R16	ASL67	14	122/118M		1500	1320	770	770	12.5	√
7.50R16	ASR35	14	122/118L		1500	1320	770	770	12.5	√ √
7.50R16	ASR35	16	125/121L		1650	1450	870	870	12.5	√
8.25R15	ASR30	18	143/141G	141/140J	2725	2575	850	850	13	√ √
8.25R16	ADC57	16	128/124L		1800	1600	770	770	16	√
8.25R16	AGC08	16	128/124L		1800	1600	770	770	13	√ √
8.25R16	AGC08	18	132/128K		2000	1800	870	870	13	√
8.25R16	AGC51	16	128/124L		1800	1600	770	770	16	√ √
8.25R16	AGM88	16	128/124J		1800	1600	770	770	18	
8.25R16	ASR35	16	128/124M		1800	1600	770	770	14	
8.25R20	AGC08	16	139/137K		2430	2300	930	930	14.5	√
8.25R20	AGM88	16	139/137F		2430	2300	930	930	20	
9.00R20	ADR26	18	148/144J		3150	2800	930	930	17	√
9.00R20	AGC08	16	144/142K		2800	2650	900	900	15.5	√ √
9.00R20	AGM10	16	144/142F		2800	2650	900	900	22	V
9.00R20	AGM88	16	144/142F		2800	2650	900	900	23	
9.00R20	ASL06	16	144/142L		2800	2650	900	900	14	
10.00R15	ASR30	18	148/145G	146/144J	3150	2900	850	850	13.5	√
10.00R13	ADC09	18	149/146K	140/ 1443	3250	3000	930	930	17	V √
10.001120	ADOUT	10	1-77/ 1-TUIX		0200	3000	750	700	17	٧

TECHNICAL SPECIFICATIONS

AEOLUS NORMAL SERIES DATA

Size	Pattern	Ply Rating	LI/SS	Second. LI/SS	Single Max. Load(kg)	DualMax. Load(kg)	Single(kPa)	Dual (kPa)	Tread depth	M+S
									mm	
10.00R20	ADC48	18	149/146K		3250	3000	930	930	20.5	√
10.00R20	ADC52	18	149/146D		3250	3000	930	930	20.5	√
10.00R20	ADR26	18	149/146K		3250	3000	930	930	17.5	√
10.00R20	AGC08	18	149/146K		3250	3000	930	930	16.5	√
10.00R20	AGC28	18	149/146K		3250	3000	930	930	20	
10.00R20	AGM10	18	149/146F		3250	3000	930	930	22	
10.00R20	AGM88	18	149/146F		3250	3000	930	930	23.5	
10.00R20	ASR29	18	149/146L		3250	3000	930	930	14	
11.00R20	ADC09	18	152/149K		3550	3250	930	930	18	√
11.00R20	ADC53	18	152/149K		3550	3250	930	930	18.5	√
11.00R20	ADC59	18	152/149K		3550	3250	930	930	18	√
11.00R20	ADR26	18	152/149L		3550	3250	930	930	18.5	√
11.00R20	AGC08	18	152/149K		3550	3250	930	930	17	√
11.00R20	AGM10	18	152/149F		3550	3250	930	930	22	
11.00R20	AGM86	18	152/149F		3550	3250	930	930	24	
11.00R20	AGM88	18	152/149F		3550	3250	930	930	24	
11.00R20	AGR26	18	152/149L		3550	3250	930	930	16.5	√
12.00R20	ADC09	18	154/151K		3750	3450	830	830	18	√
12.00R20	ADC53	18	154/151K		3750	3450	830	830	20.6	√
12.00R20	ADC53	20	156/153K		4000	3650	900	900	20.6	√
12.00R20	ADC53	22	158/155J		4250	3875	970	970	20.6	$\sqrt{}$
12.00R20	ADC59	20	156/153K		4000	3650	900	900	19	√
12.00R20	ADR26	22	158/155J		4250	3875	970	970	19	√
12.00R20	AGC08	18	154/151K		3750	3450	830	830	17.5	√
12.00R20	AGC08	20	156/153K		4000	3650	900	900	17.5	√
12.00R20	AGM10	18	154/151F		3750	3450	830	830	23	
12.00R20	AGM10	20	156/153F		4000	3650	900	900	23	
12.00R20	AGM10	22	158/155F		4250	3875	970	970	23	
12.00R20	AGM86	18	154/151F		3750	3450	830	830	24.5	
12.00R20	AGM88	18	154/151F		3750	3450	830	830	24.5	
12.00R20	AGM88	20	156/153F		4000	3650	900	900	24.5	
12.00R20	AGM88	22	158/155F		4250	3875	970	970	24.5	
12.00R20	AGP59	22	158/155G		4250	3875	970	970	23	
12.00R24	ADC53	20	160/157K		4500	4125	900	900	20.6	√
12.00R24	AGC08	20	160/157K		4500	4125	900	900	17.5	V
12.00R24	AGC51	20	160/157K		4500	4125	900	900	17.5	√ ·
12.00R24	AGM10	18	158/155F		4250	3875	830	830	23	
12.00R24	AGM10	20	160/157F		4500	4125	900	900	23	

USES & MAINTENANCE

1 TYRE PRESSURE

- The working pressure of tyres should be in accordance with the current national standard and the intended application.
- "It's necessary to regularly inspect for air leakage, treating any leakage in a timely manner.
- Ensure that the air pressure is normal. For prolonged continuous use, tyre pressure should be regularly checked; if vehicle is not operated for more than six months, tyre inspection is recommended.
- » Do not bleed or inflate tyre while hot as this may result in either insufficient or excessive pressure.
- » Ensure that dual tyres and coaxial tyres are maintained at the same pressure.
- The spare tyre should be regularly inspected and maintained in a usable state.

2 PROPER TYRE INFLATION

Proper inflation ensures tyre tread remains fully in contact with the road surface, improving traction, breaking performance and safety.

3 THE ADVERSE EFFECTS OF UNDER-INFLATION

- » Reduced tyre life, especially the Drive tyre.
- Crown of the tyre more easily to bruised, resulting in chip and chunking.
- » Reduced ride the comfort.
- » Reduced grip.
- » Reduced the durability; thereby reducing the ability to retread.

4 UNFAVORABLE EFFECTS OF TYRE OVER-INFLATION

- » Reduced tyre life, especially the Drive tyre.
- >> Crown of the tyre more easily to bruised, resulting in chip and chunking.
- » Reduced ride the comfort.
- » Reduced grip
- » Reduced the durability; thereby reducing the ability to retread.



TRUCK & BUS RADIAL TYRES - 79 -

USES & MAINTENANCE


5 LOADING

- » The load on tyres should be in accordance with the current national standards; avoid overloading.
- » Overloading will shorten tyre life. Overloaded Tyres will build up heat quickly, causing damage including shoulder separation and bead explosion.
- » Tyres with high ply rating or bearing heavy load should not be run at high speed for prolonged periods.
- » Cargo load should be distributed load in order to avoid uneven load over a single tyre.

6 TYRE CARE TECHNIQUES

- If the vehicle is operated at high speed for a long distance, it should be stopped periodically to allow tyre heat to dissipate. Do not spray with cool water to reduce heat.
- The vehicle should avoid sudden acceleration,
 - emergency brake and sharp tums.
- Take care to prevent excessive speeds and, overloading.
- In poor road conditions, drive more slowly to avoid tyres being impacted by sharp objects.
- Tyres should be inspected often, with any damage found repaired immediately.
- A tyre should be replaced as soon as the tyre is
- worn to the wear mark.
- » A retreaded tyre should not be used as Steering
- tyre to ensure security of the vehicle.
- After driving at high speed for 1-2 hours, it is recommended to rest 15-20 minutes and check the tyres.




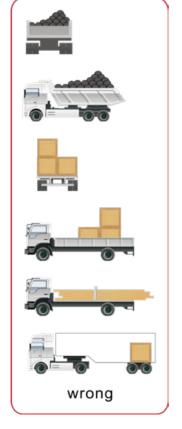

USES & MAINTENANCE

7 ROTATION

Generally, front wheels under the influence of brakes, are more prone to uneven wear. Rear positions, especially the Drive position, wear more quickly than Steer tyres due to heavy loads. Refer to the figure below for tyre rotation method.

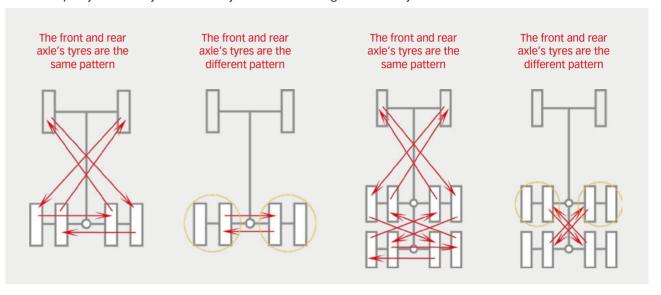

8 BRAKING SYSTEM

Improper balance or components fault may lead to pneumatic brake breakdown, causing uneven tyre wear and damage.

Fault	Possible Reasons	Result				
Excess heat caused by braking	 Improper shift on downhill leading to rapid heat buildup Repeatedly start and stop with no time for cool down Improper adjustment causing one or more brakes to exert too much force 	Tyre bead damage – initially, the bead deformation, then bead wire separates from the bead ring.				
Brake lock	 Traction and braking system Failures The bleeder valve bleeds air too slow Slack adjuster is misadjusted Brake drum deviation 	Irregular wear of the tyre tread.				

TRUCK & BUS RADIAL TYRES - 81 -